

LED SLIM DISKS
PK613LED • FIXED 3-LIGHT ROUND




HOUSING RING FOR SURFACE MOUNTING



PK H600C
 (Sold separately)
 Aluminum Housing for surface mount.
Dimensions: 2-3/4"Ø x 3/4"H
Finish: SN – Satin Nickel

SPECIFICATIONS

Model	PK613LED-38-30	PK613LED-38-40	PK613LED-38-65
LED Quantity	3 x 1W	3 x 1W	3 x 1W
Input Voltage	12V DC	12V DC	12V DC
Wattage	4.2W	4.2W	4.2W
Lumens	122 lm	138 lm	190 lm
Efficacy	29 lm/W	29 lm/W	45 lm/W
Color Temperature	3000K	4000K	6500K
Beam Angle*	38°	38°	38°
Current†	350mA	350mA	350mA
Lamp Life	50,000 hours	50,000 hours	50,000 hours
Dimensions	2-3/4" Ø x 3-3/4" H x 3/16" Ext	2-3/4" Ø x 3-3/4" H x 3/16" Ext	2-3/4" Ø x 3-3/4" H x 3/16" Ext
Cut Out	2-3/8" Ø	2-3/8" Ø	2-3/8" Ø
Housing	Aluminum	Aluminum	Aluminum
Finish‡	Brushed Aluminum (Standard)	Brushed Aluminum (Standard)	Brushed Aluminum (Standard)
Operating Temperature	5°F - 122°F	5°F - 122°F	5°F - 122°F
Mounting§	Recess or Surface Mount	Recess or Surface Mount	Recess or Surface Mount
Environment	Dry, Indoor	Dry, Indoor	Dry, Indoor
Warranty	5 Years – see published warranty terms for detailed information.		
Certifications	 Intertek CE, RoHS		

* 38° standard beam angle.

This fixture requires a constant current power supply. However, the in-line driver allows the use of constant voltage power supply.

Surface Mount sold separately.

ORDERING INSTRUCTIONS

Example: **MODEL** – **BEAM ANGLE** – **CCT** – **FINISH**
 PK613 LED – 38 – 30 – BA

DESCRIPTION

- Fixed 3-Light Round Slim Disk.
- Includes In-line 12V 3W 350mA electronic LED driver.
- Includes 72" in-line extension cable.




LED SLIM DISKS PK613LED • FIXED 3-LIGHT ROUND

WIRING DIAGRAMS

EASY INSTALLATION

Plug and Play Dim/Non-Dim

Parallel Port P+P

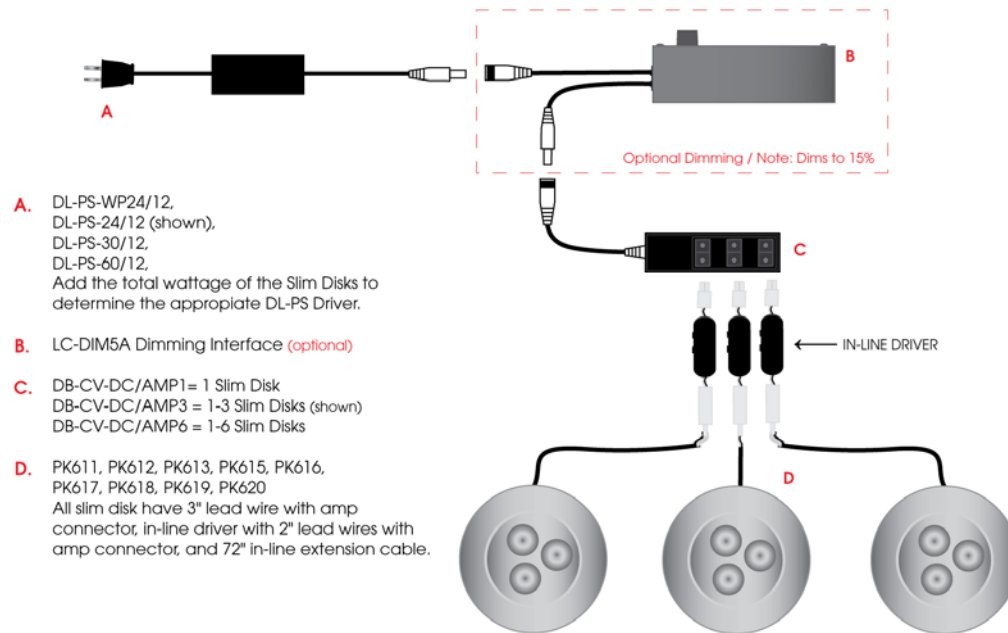

HARD WIRE - New Construction Dim/Non-Dim

Parallel Port HW

