

LED SLIM DISKS
PK612LED • FIXED 3-LIGHT SQUARE




HOUSING RING FOR SURFACE MOUNTING



PK H600B
 (Sold separately)
 Aluminum Housing for surface mount.
Dimensions: 3"Ø x 1"H
Finish: SN – Satin Nickel

SPECIFICATIONS

| Model | PK612LED-38-30 | PK612LED-38-40 | PK612LED-38-65 |
|-----------------------|--|-----------------------------|-----------------------------|
| LED Quantity | 3 x 1W | 3 x 1W | 3 x 1W |
| Input Voltage | 12V DC | 12V DC | 12V DC |
| Wattage | 4.2W | 4.2W | 4.2W |
| Lumens | 122 lm | 138 lm | 190 lm |
| Efficacy | 29 lm/W | 29 lm/W | 45 lm/W |
| Color Temperature | 3000K | 4000K | 6500K |
| Beam Angle* | 38° | 38° | 38° |
| Current† | 350mA | 350mA | 350mA |
| Lamp Life | 50,000 hours | 50,000 hours | 50,000 hours |
| Dimensions | 3-1/8"Ø x 1-1/8"H x 1/8"Ext | 3-1/8"Ø x 1-1/8"H x 1/8"Ext | 3-1/8"Ø x 1-1/8"H x 1/8"Ext |
| Cut Out | 2-5/8"Ø | 2-5/8"Ø | 2-5/8"Ø |
| Housing | Aluminum | Aluminum | Aluminum |
| Finish‡ | Brushed Aluminum (Standard) | Brushed Aluminum (Standard) | Brushed Aluminum (Standard) |
| Operating Temperature | 5°F - 122°F | 5°F - 122°F | 5°F - 122°F |
| Mounting§ | Recess or Surface Mount | Recess or Surface Mount | Recess or Surface Mount |
| Environment | Dry, Indoor | Dry, Indoor | Dry, Indoor |
| Warranty | 5 Years – see published warranty terms for detailed information. | | |
| Certifications |  Intertek CE, RoHS | | |

* 38° standard beam angle

This fixture requires a constant current power supply. However, the in-line driver allows the use of constant voltage power supply.

Surface Mount housing sold separately.

DESCRIPTION

- Fixed 3-Light Square Slim Disk.
- Includes In-line 12V 3W 350mA electronic LED driver.
- Includes 72" in-line extension cable




LED SLIM DISKS PK612LED • FIXED 3-LIGHT SQUARE

WIRING DIAGRAMS

EASY INSTALLATION

Plug and Play Dim/Non-Dim

Parallel Port P+P

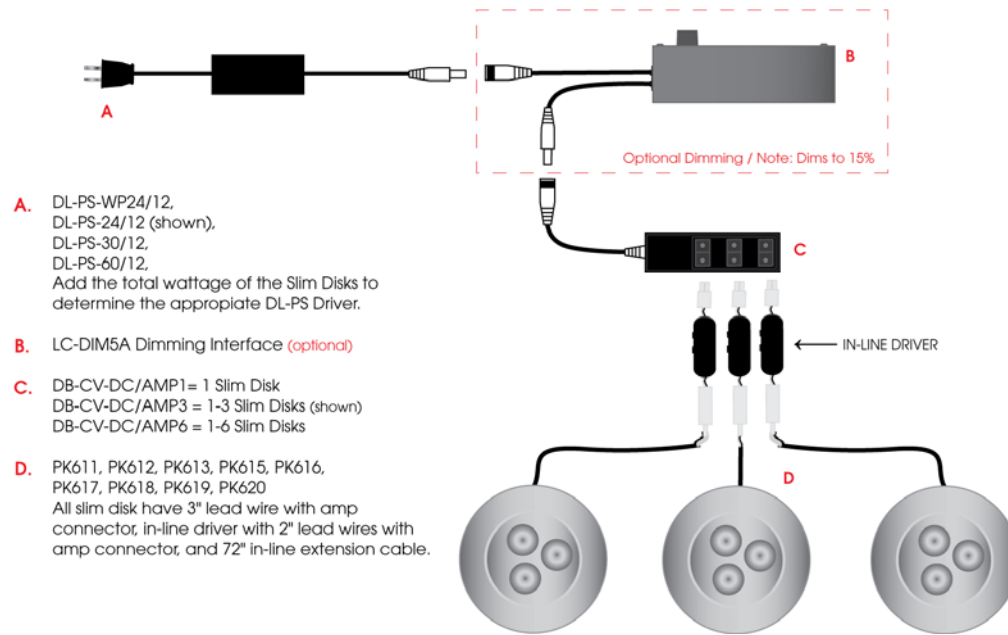

HARD WIRE - New Construction Dim/Non-Dim

Parallel Port HW

